


LEGEND

- ① 6 IN. CONC. DRIVE AND 6 IN. CONC. SIDEWALK THE WIDTH OF THE DRIVE
- ② SIDEWALK OUTSIDE OF DRIVE WIDTH SHALL BE A MIN. OF 4 IN.
- ③ 1 IN. EXPANSION JOINT (ODOT ITEM 705.03) SHALL BE USED WHERE DRIVE APRON MEETS EXISTING CONC. PAVEMENT
- ④ 1/2 IN. EXPANSION JOINT (ODOT ITEM 705.03) SHALL BE USED IN ALL OTHER AREAS WHERE NEW CONC. MEETS EXISTING CONC.

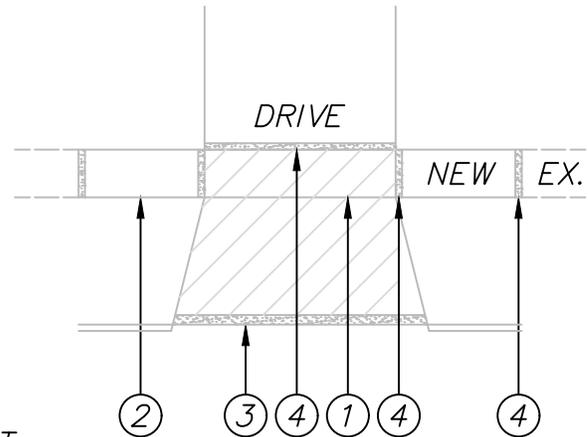

NOT TO SCALE

NOTES:

1. ALL SIDEWALK IN CITY RIGHT-OF-WAY SHALL BE CONSTRUCTED PER ODOT 608.03, UNLESS APPROVED BY THE CITY ENGINEER. WALKS MUST BE ADA COMPLIANT.
2. ALL PROPERTY PINS AND POINT OF CURVATURE PINS MUST BE IN PLACE PRIOR TO CONSTRUCTION AND INSPECTION OF SIDEWALK.
3. SIDEWALKS SHALL BE 1 FT. OFF PROPERTY PINS, WITHIN THE RIGHT-OF-WAY, WITH A 1/4 IN./FT. OF FALL ACROSS THE WALK AND 1/2 IN./FT. OF FALL FROM FACE OF WALK TO BACK OF CURB.
4. SIDEWALK SLAB REPLACEMENTS MUST MATCH AND MEET ADJACENT SIDEWALKS.
5. ALL PERMITS MUST BE OBTAINED BEFORE STARTING CONSTRUCTION AND THE ENGINEERING DEPARTMENT SHALL BE CONTACTED 24 HOURS PRIOR TO POURING. PLEASE CALL 330-335-2751 TO SET UP A TIME AND DATE FOR ALL INSPECTIONS.
6. ALL ODOT MAINTENANCE OF TRAFFIC STANDARDS ARE TO BE FOLLOWED.
7. WALKS MUST BE BACKFILLED WITHIN 2 DAYS AFTER INSTALLATION.